CLASS 2 TRAILER HITCH R2-0867

EQUINOX/TORRENT/VUE/TERRAIN

TOOLS REQUIRED: RATCHET, SOCKET EXTENSION,

TORQUE WRENCH DRILLS: NONE


SOCKETS/WRENCHES: 18mm,19mm, 7/8"

3,500 LB GROSS TRAILER WEIGHT, 300 LB TONGUE WEIGHT. WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS AND LIMITATIONS. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

WARNING: USE ONLY RIGID HITCH APPROVED AND MANUFACTURED DRAW BAR

INSERT OR WARRANTY WILL BE VOID

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

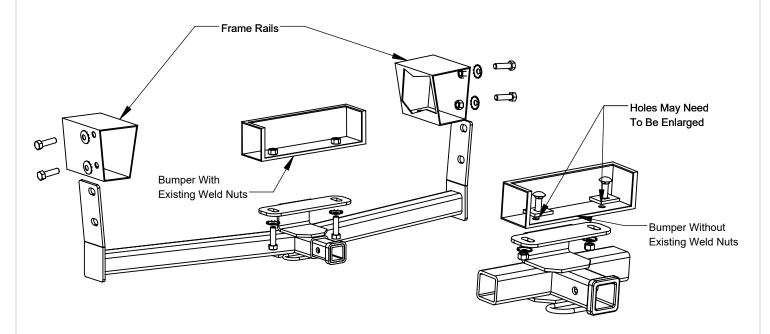

- If present remove the tie down brackets from the frame rail. Return bolts and brackets to owner. 1.
- 2. If present remove the center fascia door panel and return to owner.
- 3. Raise hitch into position and secure inserting (4) 12mm hex bolts and conical washers into the existing weld nuts in the sides of the frame rails.
- If weld nuts are present in the bumper insert (2) 12mm hex bolts and conical washers through bumper mounting 4. bracket and into the existing weld nuts in the bumper.
- If weld nuts are not present in the bumper use the fish wire provided to pull a 1/4 x 1-1/2 x 2 block plate and 1/2" 5. carriage bolt through each end of the bumper and down into the mounting holes in the bottom of the bumper beam. Secure with 1/2" heavy hex nuts and conical washers. Note: It may be necessary to enlarge the holes to accommodate the 1/2" carriage bolts.
- 6. Tighten 12mm bolts to 68 LB-FT, 1/2" hex nuts to 60 LB-FT.

Note: Due to different configurations of the vehicle there will be hardware remaining.


THANK YOU FOR PURCHASING A RIGID HITCH

HARDWARE PACKAGE:

- (6) 12MM 1.75X 40MM BOLTS (6) 1/2" CONICAL WASHERS (2) 1/2-13 X 1-3/4" CARRIAGE BOLTS

- (2) 1/2-13 HEAVY HEX NUTS
- (2) 1/4 X 1-1/2 X 2 SQUARE HOLE BLOCK PLATES
- 1/2" FISH WIRE
- (1) R2-0206 DRAW BAR KIT

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER



THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR SAE AND VESC REGULATION V-FOR CONNECTING DEVICES AND TOWING SYSTEMS. <u>DO NOT MODIFY</u> THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

